

ホソダのゴムブッシング



まく付き型




穴あき型



ケーブルサポート型

■寸法表

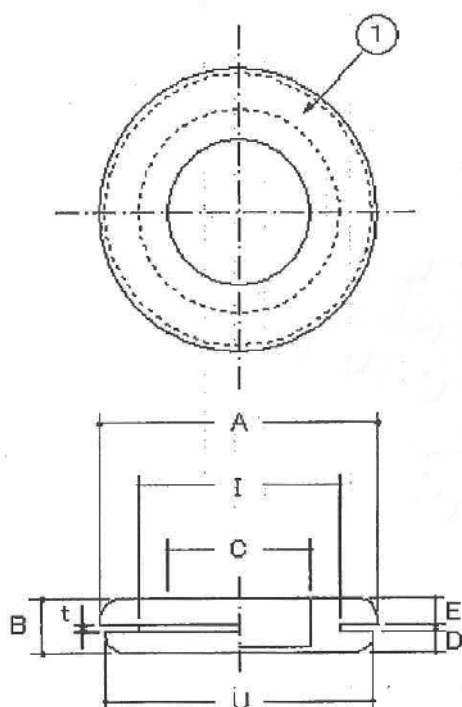

品名	A	I	C	U	E	D	t	B
15 mm	23.0	16.0	13.0	21.5	3.0	2.8	1.8	7.6
19 (16) mm	27.4	21.3	17.0	25.8	2.9	2.5	1.8	7.2
25 (22) mm	34.0	26.8	21.2	32.2	3.6	3.0	1.8	8.4
31 (28) mm	42.0	34.0	25.5	40.0	4.3	3.6	1.8	9.7
39 mm	49.0	40.0	31.0	47.0	4.7	4.0	2.1	10.8
51 mm	63.5	52.5	41.0	61.5	5.5	4.6	2.1	12.2
63 mm	77.0	65.5	51.5	75.0	6.4	5.3	2.3	14.0
75 mm	92.0	78.0	62.5	90.0	7.2	5.9	2.3	15.4
36 mm	53.5	43.0	33.0	52.0	5.5	4.5	2.3	12.3
42 mm	60.0	49.0	39.0	57.5	5.5	4.5	2.3	12.3
54 mm	73.0	61.0	50.0	70.5	6.0	5.0	3.0	14.0
70 mm	90.0	77.0	65.0	88.0	7.5	6.0	3.0	16.5
82 mm	105.0	90.0	76.0	103.0	8.0	6.5	3.0	17.5