


シバケイコンベックス




型番	寸法 (mm)						結束範囲 (径) (mm)	推奨締付力 (kg)	ループ引張強度規格値 (kg)
	a	b	c	d	e	f			
CV- 70N, CV- 70B	70	5	4	2.5	2.5	0.9	1.6~ 6	3~ 4	7
CV- 80N, CV- 80B	80	6	6.2	3.5	4	1.2	1.6~ 15	7~ 9	18
CV- 90N, CV- 90B	90	4.7	4.8	2.3	3.1	1.0	1.6~ 16	5~ 7	10
CV- 100N, CV- 100B	100	5	5	2.5	3.6	1.0	1.6~ 20	4~ 6	10
CV- 125N, CV- 125B	125	8	6.8	4.9	5	1.2	5~ 30	12~14	25
CV- 150N, CV- 150B	150	6	6	3.5	4	1.2	5~ 35	7~10	18
CV- 175N, CV- 175B	175	8	6.8	4.9	5	1.2	5~ 40	12~14	30
CV- 200N, CV- 200B	290	8.5	7.5	4.6	5	1.3	5~ 45	9~11	23
CV- 250N, CV- 250B	250	8.9	7.5	4.9	5.5	1.5	5~ 60	12~14	25
CV- 300N, CV- 300B	300	9	8	4.9	5.5	1.5	5~ 80	12~14	30
CV- 350N, CV- 350B	350	11.9	11	7.5	6.9	1.9	5~ 90	20~22	55
CV- 400N, CV- 400B	400	9	8	4.9	6	1.5	15~110	12~14	30
CV- 450N, CV- 450B	450	16	15.8	9.0	10	2.0	15~125	22~25	80
CV- 550N, CV- 550B	550	20.5	17.1	13.0	12.2	2.0	15~150	25~27	115
CV- 800N, CV- 800B	800	14.0	12.5	9.0	8.5	2.0	30~230	22~25	80
CV-1000N, CV-1000B	1,000	20	15.5	13.0	10.0	2.2	75~240	25~27	100


ナイロクリップ

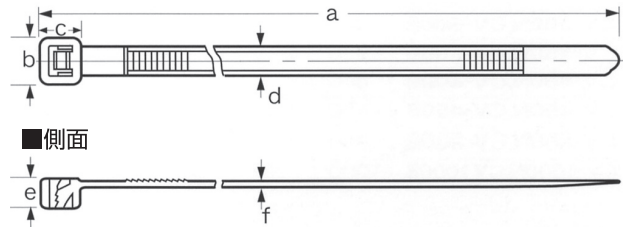

仕様

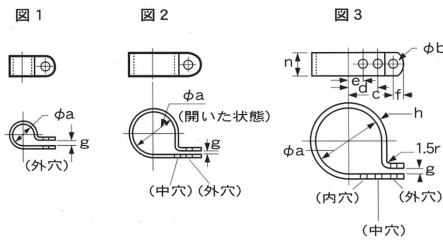

使用方法



型 番		図番	固定時の内径 (mm)			寸 法 (mm)										包装単位 (個/袋)
			外穴	中穴	内穴	φa	φb	c	d	e	f	g	h	n		
SN- 2A	SN-2A-B	1	2.5	—	—	3.3	4.4	9.5	—	—	4.8	3.2	1.1	9.5	100	
SN- 3A	SN-3A-B	1	4.6	—	—	5.3	4.4	10.3	—	—	4.8	4.8	1.1	9.5	100	
SN- 4A	SN-4A-B	1	5.6	—	—	6.8	4.4	11.1	—	—	4.8	4.8	1.1	9.5	100	
SN- 5A	SN-5A-B	1	7.4	—	—	8.4	4.4	11.9	—	—	4.8	4.8	1.1	9.5	100	
SN- 6A	SN-6A-B	1	9.5	—	—	10.6	4.4	12.7	—	—	4.8	6.4	1.1	9.5	100	
SN- 7A	SN-7A-B	1	10.7	—	—	12.2	4.4	13.5	—	—	4.8	6.4	1.1	9.5	100	
SN- 8A	SN-8A-B	1	11.9	—	—	13.2	4.4	14.3	—	—	4.8	6.4	1.1	9.5	100	
SN- 9A	SN-9A-B	1	13.5	—	—	15.2	4.4	15.1	—	—	4.8	6.4	1.1	9.5	100	
SN-10A	SN-10A-B	1	14.0	—	—	16.0	4.4	15.9	—	—	4.8	6.4	1.1	9.5	100	
SN-11A		1	16.8	—	—	19.0	5.1	17.5	—	—	6.4	7.9	1.8	12.7	100	
SN-12A		1	17.8	—	—	19.8	5.1	18.2	—	—	6.4	7.9	1.8	12.7	100	
SN-13A		1	20.8	—	—	22.1	5.1	19.0	—	—	6.4	7.9	1.8	12.7	100	
SN-14A		2	21.3	18.5	—	22.9	5.1	19.8	11.9	—	6.4	7.9	1.8	12.7	100	
SN-16A		2	24.4	22.3	—	26.9	5.1	21.4	13.5	—	6.4	7.9	1.8	12.7	100	
SN-18A		2	26.7	24.1	—	29.2	5.1	23.0	15.1	—	6.4	7.9	1.8	12.7	100	
SN-24A		3	37.3	35.0	31.2	39.4	5.1	27.6	19.8	11.9	6.3	9.5	1.8	12.7	50	
SN-32A		3	48.8	46.2	43.7	52.1	5.1	34.1	24.6	13.5	6.3	9.5	1.8	12.7	25	